


Technical Data


Color	Brown		
Compound	Buna-N		
Plies	2		
Fabric/Carcass	Polyester Nylon		
Cover Surface	.156" Rough Top		
Hardness	70 Durometer		
Bottom Surface	Treated Fabric		
Coefficient/Friction	.30 on Steel		
Working Strength	100 lbs piw		
Overall Gauge	.254"		
Weight per Sq Ft	.98		
Minimum Pulley	Normal-180°	2"	Back Flex 3"
Temp Range °F	0 to 250		
Food Approved	No		
Anti-Static	No		
Recommended Splice	Step Lap		
Clipper Lace	#36 Recessed		
Alligator Lace	#7 Recessed		
Maximum Width	72"		

Features/Benefits:

Excellent oil and grease resistance. Very good resistance to acids and solvents but avoid high concentrations. Ozone resistant. Treated fabric increases ply/cover adhesion and decreases edge curl. Thick skims between the plies provides desired bulk. These belts are ideal as inexpensive, yet oil resistant rough tops for general duty inclines/declines. For laces, a recessed cover is recommended.

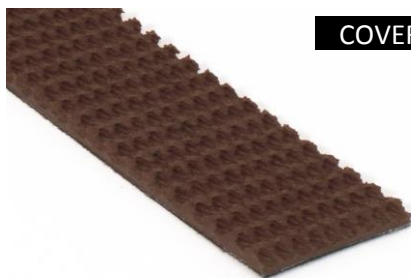

COVER

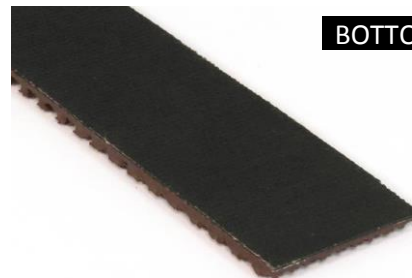

BOTTOM