



Belt Name:
5 Ply Texan


Part #
02-706

Technical Data

Color	Tan		
Compound	SBR		
Plies	5		
Fabric/Carcass	Cotton/Polyester		
Cover Surface	Friction		
Hardness	N/A		
Bottom Surface	Friction		
Coefficient/Friction	0.3		
Working Strength	150# PIW		
Overall Gauge	.25"		
Weight per Sq Ft	1.64#		
Minimum Pulley	Normal-180°	6"	Back Flex 6"
Temp Range °F	-40°F to 250°F		
Food Approved	No		
Anti-Static	No		
Recommended Splice	Step		
Clipper Lace	#4 1/2		
Alligator Lace	#27 OR #187		
Maximum Width	72"		

Features/Benefits:

Commonly referred to as 5-ply transmission belt or a "5-ply friction surface belt". Can be used for both slider bed and roller bed applications and has been a staple in general industrial applications for years. Avoid applications with high exposure to oils.

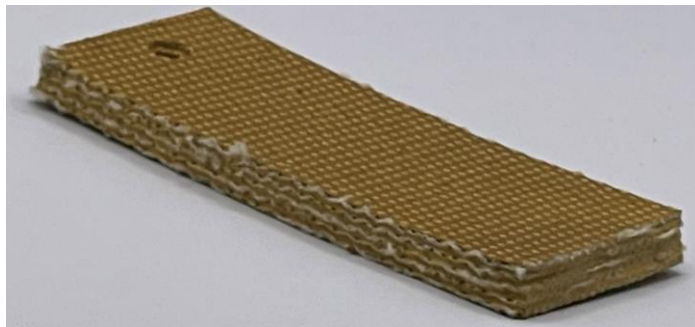

Phone: (800) 451-4537 Fax: (800) 338-2358 www.sparksbelting.com