



Belt Name:
58 NF&F


Part #
02-704

Technical Data

Color	Red
Compound	Nitrile
Plies	5
Fabric/Carcass	Cotton/Polyester
Cover Surface	Friction
Hardness	N/A
Bottom Surface	Friction
Coefficient/Friction	0.3
Working Strength	60# PIW
Overall Gauge	0.109
Weight per Sq Ft	.074#
Minimum Pulley	
Normal-180°	1.5" Back Flex 1.5"
Temp Range °F	10° F to 250° F
Food Approved	No
Anti-Static	No
Recommended Splice	Step
Clipper Lace	#1A
Alligator Lace	#7 or #62
Maximum Width	72"

Features/Benefits:

Ideal for accumulating applications or general transport. 58NF&F is a robust belt that will wrap around a small 1.5" pulley. The belt features a tightly woven construction of polyester impregnated with nitrile that is suitable for oily applications. Due to the nitrile construction, the belt is inherently oil resistant and will withstand higher temperatures compared to a monofilament style belt.

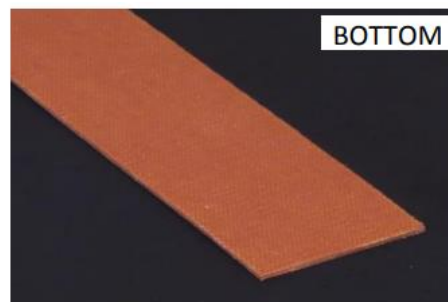

Phone: (800) 451-4537 Fax: (800) 338-2358 www.sparksbelting.com