


Technical Data


| | | | |
|----------------------|-----------------|----|--------------|
| Color | Green | | |
| Compound | Polyurethane | | |
| Plies | 1 | | |
| Fabric/Carcass | Woven Polyester | | |
| Cover Surface | .094" Urethane | | |
| Hardness | 85 Durometer | | |
| Bottom Surface | Friction | | |
| Coefficient/Friction | .22 on Steel | | |
| Working Strength | 120 lbs piw | | |
| Overall Gauge | .188" | | |
| Weight per Sq Ft | 1.13 | | |
| Minimum Pulley | Normal-180° | 4" | Back Flex 6" |
| Temp Range °F | 0 to 185 | | |
| Food Approved | No | | |
| Anti-Static | No | | |
| Recommended Splice | Finger | | |
| Clipper Lace | #3 | | |
| Alligator Lace | #25 | | |
| Maximum Width | 72" | | |

Features/Benefits:

Excellent oil and grease resistance. Good resistance to acids, chemicals and hydrocarbon solvents. Woven carcass eliminates ply separation. The smooth, heavy polyurethane cover offers superior wear and resistance to cutting, gouging and abrasion in steel and applications. Best tracking on conveyors with 5:1 ratio (length:width).

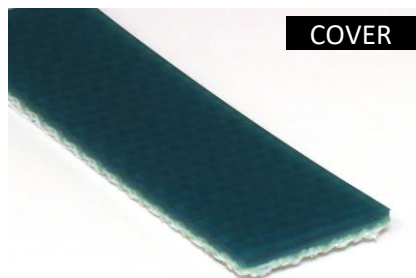

COVER

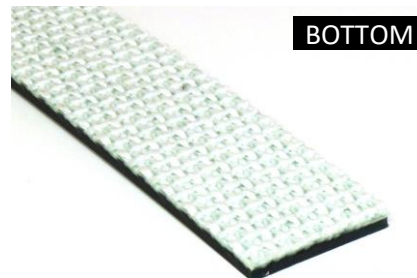

BOTTOM