


Technical Data


Color	Green		
Compound	Polyurethane		
Plies	1		
Fabric/Carcass	Woven Polyester		
Cover Surface	.062" Smooth		
Hardness	85 Durometer		
Bottom Surface	Friction		
Coefficient/Friction	.25 on Steel		
Working Strength	90 lbs piw		
Overall Gauge	.125"		
Weight per Sq Ft	.95		
Minimum Pulley	Normal-180°	2"	Back Flex 3"
Temp Range °F	0 to 185		
Food Approved	Yes		
Anti-Static	No		
Recommended Splice	Finger or Welded		
Clipper Lace	#2		
Alligator Lace	#7		
Maximum Width	72"		

Features/Benefits:

Excellent resistance to cutting oils, grease and hydrocarbon solutions. Good resistance to acids and alkaline solutions, but avoid high concentrations. Good resistance to cutting, gouging and abrasion. This belt has low stretch and tracks easily. Uses include brick manufacturing, metal stampings, and reclamation/recycling applications.

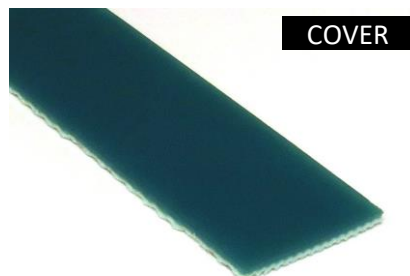

COVER

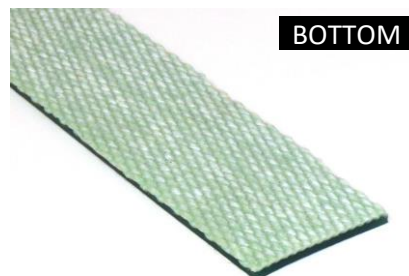

BOTTOM