



Belt Name:
HSW White Silicone


Part #
02-708

Technical Data

Color	White/Black
Compound	Silicone
Plies	3
Fabric/Carcass	Cotton/Polyester
Cover Surface	Silicone
Hardness	75 Durometer Shore A
Bottom Surface	Friction
Coefficient/Friction	0.6
Working Strength	90# PIW
Overall Gauge	.156"
Weight per Sq Ft	.9#
Minimum Pulley	
Normal-180°	3" Back Flex 5"
Temp Range °F	-40° F to 250° F Carcass '-100° F to 500° F Cover
Food Approved	No
Anti-Static	No
Recommended Splice	Step
Clipper Lace	#3
Alligator Lace	#25
Maximum Width	72"

Features/Benefits:

Specially designed for applications requiring release of wet, sticky, or warm products such as uncured/green rubber while its cooled by water in various stages of rubber processing. The silicone cover provides excellent resistance to heat with great release qualities. Do not use in oven applications.

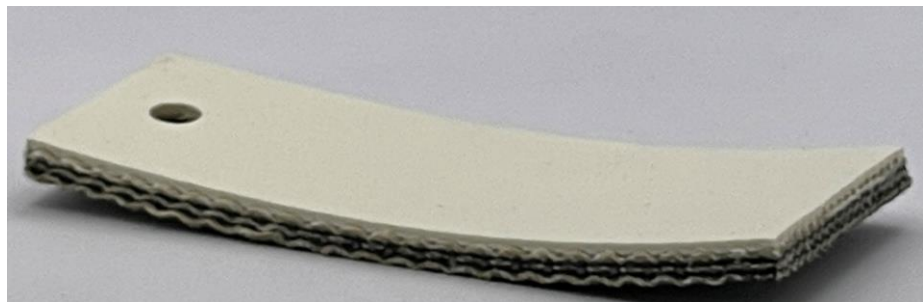

Phone: (800) 451-4537 Fax: (800) 338-2358 www.sparksbelting.com