



Belt Name:
MF BLU 210 HT


Part #
03-700

Technical Data

Color	Blue		
Compound	High Temperature Polyurethane		
Plies	2		
Fabric/Carcass	Cross-Rigid Polyester		
Cover Surface	Matte		
Hardness	86 Durometer Shore A		
Bottom Surface	PU Impregnated		
Coefficient/Friction	0.2		
Working Strength	5 N/mm	28# @ 1% Elongation	
Overall Gauge	.047"		
Weight per Sq Ft	.246#		
Minimum Pulley			
Normal-180°	.315"	Back Flex	.59"
Temp Range °F	-4° F to 311° F		
Food Approved	Yes		
Anti-Static	Yes		
Recommended Splice	Finger		
Clipper Lace	UCM36XSP		
Alligator Lace	00		
Maximum Width	78"		

Features/Benefits:

Ideal for bakeries for oven infeed and outfeed conveyors. Suitable for high temperature applications in plastic injection molding. Perfect choice for a variety of industrial applications where a traditional monofilament belt will not withstand the temperature constraints.

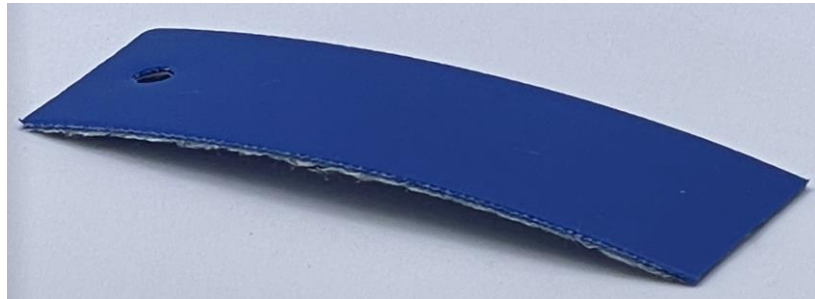

Phone: (800) 451-4537 Fax: (800) 338-2358 www.sparkselting.com