



Belt Name:  
**MF GP 310 ST**


Part #:  
**03-713**

### Technical Data

Color	Green		
Compound	PVC		
Plies	3		
Fabric/Carcass	Monofilament Polyester		
Cover Surface	Matt		
Hardness	35 Durometer Shore A		
Bottom Surface	Impregnated		
Coefficient/Friction	0.25		
Working Strength	102# @ 1%		
Overall Gauge	.236"		
Weight per Sq Ft	1.43#		
Minimum Pulley			
Normal-180°	5.9"	Back Flex	7.8"
Temp Range °F	14° F to 158° F		
Food Approved	No		
Anti-Static	Yes		
Recommended Splice	Step		
Clipper Lace	#3		
Alligator Lace	#25 or #187		
Maximum Width	102"		

#### Features/Benefits:

Commonly used on Folding Rail conveyors. Heavy duty construction results in strong cross-width integrity with demanding vacuum draw applications. The 3-ply construction provides superior mechanical lace retention.

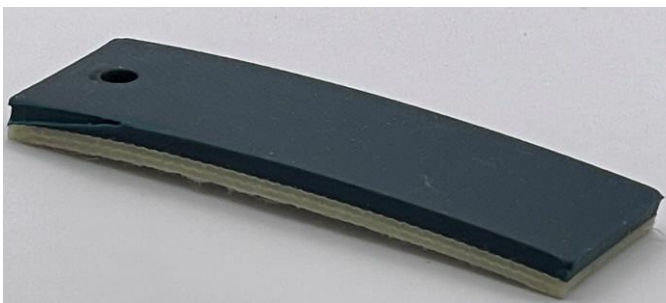

Phone: (800) 451-4537 Fax: (800) 338-2358 [www.sparksbelting.com](http://www.sparksbelting.com)

6/28/2022