



Belt Name:

Part #:


## Mono Flex LBP 210 FR

### Technical Data


Color	Black		
Compound	PVC	FR Rated ASTM D-378	
Plies	2		
Fabric/Carcass	Monofilament Polyester		
Cover Surface	.024" Smooth		
Hardness	78		
Bottom Surface	Bare		
Coefficient/Friction	.2 on Steel		
Working Strength	60 lbs piw		
Overall Gauge	.079"		
Weight per Sq Ft	0.49		
Minimum Pulley			
Normal-180°	1"	Back Flex	2"
Temp Range °F	14 to 176		
Food Approved	No		
Anti-Static	Yes		
Recommended Splice	Split Finger		
Clipper Lace	#36 or #25 LP		
Alligator Lace	#1 A		
Maximum Width	72"		

#### Features/Benefits:

Proven performance in packaging handling, weigh scales, check-out counters, and electronic components. Limited resistance to oils and grease. Good resistance to most acids and solvents, except in high concentrations. Belt lays flat with no edge curl.

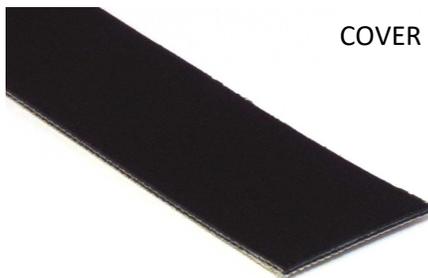

COVER

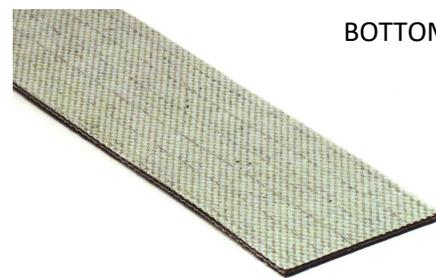

BOTTOM