

Technical Data


Color	Gray		
Compound	Polyurethane		
Plies	2		
Fabric/Carcass	Monofilament Polyester		
Cover Surface	Smooth PU		
Hardness	90 Durometer		
Bottom Surface	Bare		
Coefficient/Friction	.20 on Steel		
Working Strength	35 lbs piw		
Overall Gauge	.058"		
Weight per Sq Ft	.30		
Minimum Pulley	Normal-180°	1"	Back Flex 1"
Temp Range °F	0 to 212		
Food Approved	No		
Anti-Static	Yes		
Recommended Splice	Finger		
Clipper Lace	#25		
Alligator Lace	#00		
Maximum Width	78.8"		

Features/Benefits:

Very good oil (mineral and petroleum) resistance. Good resistance to acids and solvents, except in high concentrations. Good product release. Negotiates small pulleys. Belt lies very flat. Uses include magnetic can lines, composite can palletizers, cross lapper aprons, paper ream conveyors, and plastic bag machines. Use care with sharp pointed metal parts.



COVER

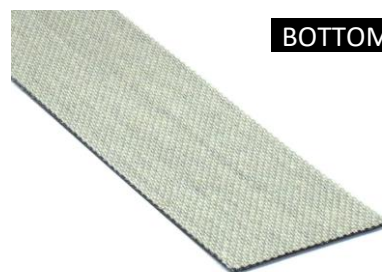

BOTTOM