



Belt Name:  
**Mono Flex BLP 230**


Part #:  
**03-423**

### Technical Data


Color	Blue		
Compound	PVC		
Plies	2		
Fabric/Carcass	Monofilament Polyester		
Cover Surface	.079" Rough Top		
Hardness	40 Durometer		
Bottom Surface	Bare Fabric		
Coefficient/Friction	.20 on Steel		
Working Strength	56 lbs. @ 1% Elongation		
Overall Gauge	.209"		
Weight per Sq Ft	0.81		
Minimum Pulley			
Normal-180°	2.4"	Back Flex	4.7"
Temp Range °F	-13 to 194		
Food Approved	No		
Anti-Static	No		
Recommended Splice	Split Finger/SFL		
Clipper Lace	#1 or #2 Recessed		
Alligator Lace	#15 Recessed		
Maximum Width	80.7"		

#### Features/Benefits:

Excellent oil and grease resistance. Good resistance to acids and solvents but avoid high concentrations. Belt lays very flat. Very good choice on case sealers or on incline applications. This belt will handle plastic totes up to 25 degrees; boxes or crates up to 30 degrees; bags up to 35 degrees. For laces, a recessed cover is recommended.

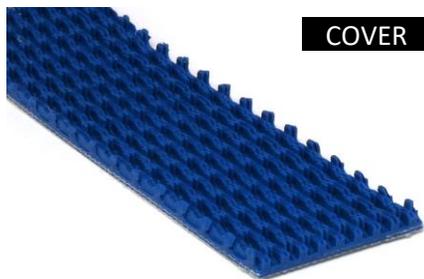

**COVER**

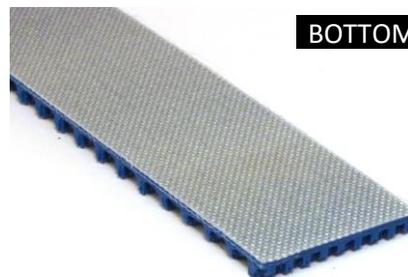

**BOTTOM**