

Technical Data


Color	Black		
Compound	PVC		
Plies	2		
Fabric/Carcass	Monofilament Polyester		
Cover Surface	.051" Matte Smooth		
Hardness	80 Durometer		
Bottom Surface	Bare		
Coefficient/Friction	.18 on Steel		
Working Strength	90 lbs piw		
Overall Gauge	.118"		
Weight per Sq Ft	.68		
Minimum Pulley	Normal-180°	2"	Back Flex 3.2"
Temp Range °F	14 to 194		
Food Approved	No		
Anti-Static	Yes		
Recommended Splice	Split Finger		
Clipper Lace	#36		
Alligator Lace	#7		
Maximum Width	80.7"		

Features/Benefits:

Good resistance to oils, greases, acids and solvents, except in high concentrations. Belt lays flat with no edge curl. Uses include checkweighers, fiberglass conveying and scanners in airports. Excellent base belt for cleats and profiles. Special features include static conductive compound, excellent trackability, and a matte finish cover for good release and ease of cleaning.



COVER

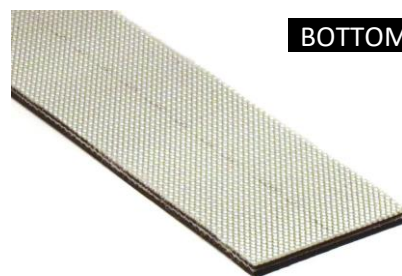

BOTTOM