


### Technical Data


Color	Black		
Compound	PVC		
Plies	2		
Fabric/Carcass	Monofilament Polyester		
Cover Surface	Rough Top		
Hardness	50 Durometer		
Bottom Surface	Bare		
Coefficient/Friction	.18 on Steel		
Working Strength	60 lbs piw		
Overall Gauge	.209"		
Weight per Sq Ft	.88		
Minimum Pulley	Normal-180°	2"	Back Flex 5"
Temp Range °F	14 to 176		
Food Approved	No		
Anti-Static	Yes		
Recommended Splice	Split Finger		
Clipper Lace	#1 or #2 SP Recessed		
Alligator Lace	#15 Recessed		
Maximum Width	78.7"		

#### Features/Benefits:

Good mineral and petroleum oil resistance. Good resistance to acids and solvents but avoid high concentrations. Belt lays flat -- no edge curl. Low stretch. Easy to track. Spun polyester offers low noise and improved abrasion resistance at high speeds. Soft (50 durometer) PVC rough top gives good grip on inclines/declines. Uses: inclines/declines for metering, luggage, boxes, mail, parcels.

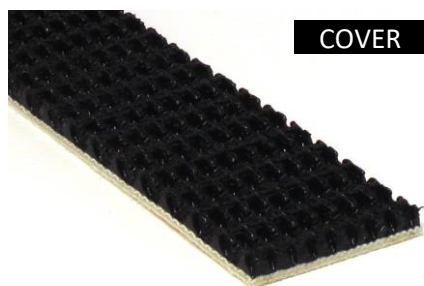

**COVER**

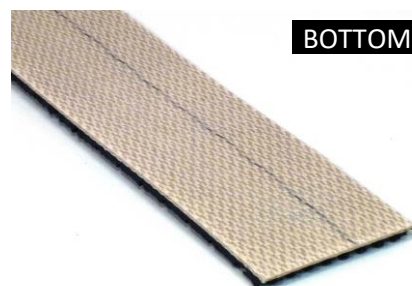

**BOTTOM**