

Technical Data


Color	Black		
Compound	PVC		
Plies	3		
Fabric/Carcass	Monofilament Polyester		
Cover Surface	Urethane Impregnated		
Hardness	N/A		
Bottom Surface	Bare		
Coefficient/Friction	.18 on Steel		
Working Strength	120 lbs piw		
Overall Gauge	.098"		
Weight per Sq Ft	.59		
Minimum Pulley	Normal-180°	2.4"	Back Flex 3.2"
Temp Range °F	-5 to 194		
Food Approved	Yes		
Anti-Static	Yes		
Recommended Splice	Finger		
Clipper Lace	#36 or #1 A		
Alligator Lace	#7		
Maximum Width	80.7"		

Features/Benefits:

Limited oil, fats and solvents resistance. The top cover has good resistance to acids, salts and bases with the exception of very strong oxidants (such as concentrated sulphuric and nitric acid). It is a good choice for ploughing, off and side loading applications, used as a roll up belt or loop belt in the fiberglass insulation industry.



COVER

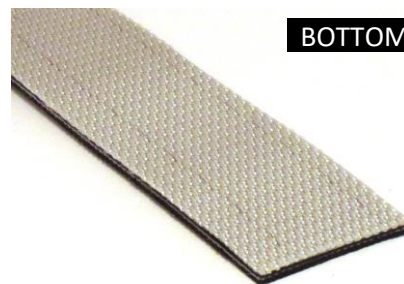

BOTTOM