



Belt Name:
Mono Flex GP 210

Part #:
03-344

Technical Data


Color	Green		
Compound	PVC		
Plies	2		
Fabric/Carcass	Monofilament Polyester		
Cover Surface	.039" Smooth		
Hardness	65 Durometer		
Bottom Surface	Bare		
Coefficient/Friction	.20 on Steel		
Working Strength	70 lbs piw		
Overall Gauge	.098"		
Weight per Sq Ft	.61		
Minimum Pulley	Normal-180°	2.4"	Back Flex 4.5"
Temp Range °F	14 to 176		
Food Approved	Yes		
Anti-Static	Yes		
Recommended Splice	Split Finger		
Clipper Lace	#36 or #1 A		
Alligator Lace	#7		
Maximum Width	76"		

Features/Benefits:

Good oil and grease resistance. Limited resistance to chemicals and solvents. FDA Approved: FDA #21 CFR 175.300. Belt lays very flat with no edge curl. Good choice as base belts for cleats and sidewalls. Used as corrugated delivery belts, sheet glass handling and as "back up" belts for glass polishers. Other uses include inspection tables for fruits, vegetables, nuts and as harvesting belts for the vegetable industry.



COVER

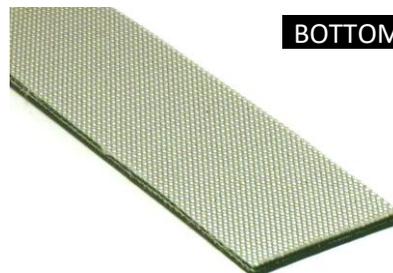

BOTTOM