



Belt Name:  
**Mono Flex GP 210 H**


Part #:  
**03-346**

### Technical Data


Color	Green
Compound	PVC
Plies	2
Fabric/Carcass	Monofilament Polyester
Cover Surface	.079" Smooth
Hardness	65 Durometer
Bottom Surface	Bare
Coefficient/Friction	.20 on Steel
Working Strength	70 lbs piw
Overall Gauge	.146"
Weight per Sq Ft	.92
Minimum Pulley	
Normal-180°	4"                      Back Flex                      6"
Temp Range °F	14 to 176
Food Approved	Yes
Anti-Static	Yes
Recommended Splice	Split Finger
Clipper Lace	#1 or #2 SP
Alligator Lace	#15
Maximum Width	112"

#### Features/Benefits:

Good oil and grease resistance to chemicals and solvents. FDA Approved: FDA #21 CFR 175.300. Belt lays very flat with no edge curl. Good choice as base belts for cleats and sidewalls. Used as corrugated delivery belts, sheet glass handling and as "back up" belts for glass polishers. Other uses include inspection tables for fruits, vegetables, nuts and as harvesting belts for the vegetable industry.

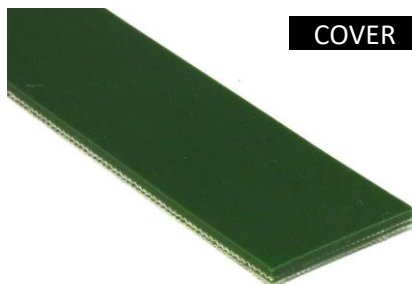

**COVER**

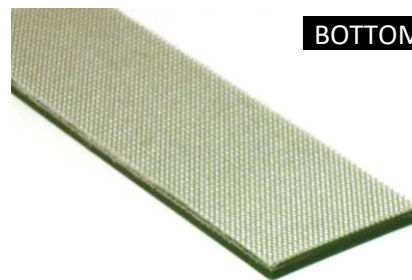

**BOTTOM**