


### Technical Data

Color	Blue/Green		
Compound	PVC		
Plies	2		
Fabric/Carcass	Monofilament Polyester		
Cover Surface	.087" Rough Top		
Hardness	35 Durometer		
Bottom Surface	Bare		
Coefficient/Friction	.20 on Steel		
Working Strength	60 lbs piw		
Overall Gauge	.209"		
Weight per Sq Ft	.88		
Minimum Pulley	Normal-180°	2"	Back Flex 5"
Temp Range °F	14 to 176		
Food Approved	No		
Anti-Static	Yes		
Recommended Splice	Split Finger		
Clipper Lace	#1 or #2 SP Recessed		
Alligator Lace	#15 Recessed		
Maximum Width	78.7"		

#### Features/Benefits:

Limited oil and grease resistance. Good resistance to acids and solvents but avoid high concentrations. Belt lays very flat. Very good choice on case sealers. On incline application, the belt will handle plastic totes up to 25 degrees; boxes or crates up to 30 degrees; bags up to 35 degrees. For laces, a recessed cover is recommended.

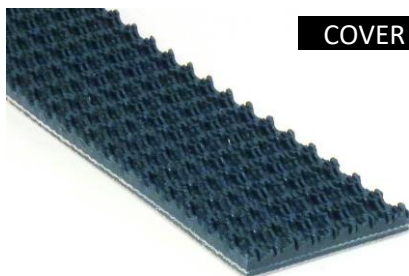

**COVER**



**BOTTOM**