

Technical Data


Color	Blue/Green		
Compound	PVC		
Plies	2		
Fabric/Carcass	Monofilament Polyester		
Cover Surface	.043" Lattice		
Hardness	30 Durometer		
Bottom Surface	Friction		
Coefficient/Friction	.20 on Steel		
Working Strength	45 lbs. @ 1% Elongation		
Overall Gauge	.102"		
Weight per Sq Ft	.55		
Minimum Pulley	Normal-180°	2"	Back Flex 3"
Temp Range °F	14 to 176		
Food Approved	Yes		
Anti-Static	Yes		
Recommended Splice	Split Finger/SFL		
Clipper Lace	#36 or #1A		
Alligator Lace	#7		
Maximum Width	118"		

Features/Benefits:

Excellent oil and grease resistance. Very good resistance to acids and solvents but avoid high concentrations. Ozone resistant. Belts lay very flat. Profile impressions improve conveying. Anti-static property reduces attraction to dust and other cont



COVER

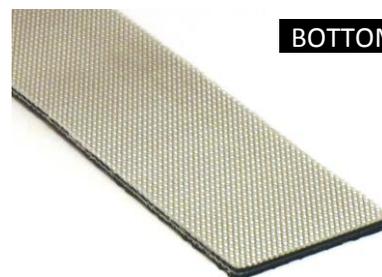

BOTTOM