

**Technical Data**


Color	Green		
Compound	PVC		
Plies	1		
Fabric/Carcass	Woven Polyester		
Cover Surface	.160" Rough Top		
Hardness	65 Durometer		
Bottom Surface	Bare		
Coefficient/Friction	.32 on Steel		
Working Strength	100 lbs piw		
Overall Gauge	.250"		
Weight per Sq Ft	.98		
Minimum Pulley	Normal-180°	2"	Back Flex 4"
Temp Range °F	0 to 180		
Food Approved	No		
Anti-Static	No		
Recommended Splice	Finger Splice		
Clipper Lace	#1 Recessed		
Alligator Lace	#7 Recessed		
Maximum Width	72"		

**Features/Benefits:**

Very good mineral and oil resistance. Good resistance to acids and solvents, except in high concentrations. Ozone resistant. Woven carcass eliminates ply separation. Stretches less than 2%. Has softer cover for better grip. Proven performance handling boxes/bundles of paer, trash and warehouse goods up/down 15 degrees. Inexpensive base belt for cleated belting. Best tracking on conveyors with 5:1 ratio (length:width). Recessing the rough top before lacing is recommended.



**COVER**

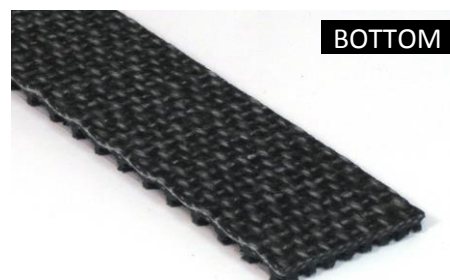

**BOTTOM**