

### Technical Data


Color	Green		
Compound	Polyurethane/PVC		
Plies	3		
Fabric/Carcass	Polyester		
Cover Surface	.004" Polyurethane Skim		
Hardness	90 Durometer		
Bottom Surface	.004" Urethane Skim		
Coefficient/Friction	.35 on Steel		
Working Strength	86 lbs. @ 1% Elongation		
Overall Gauge	.142"		
Weight per Sq Ft	.84		
Minimum Pulley	Normal-180°	6"	Back Flex 8"
Temp Range °F	5 to 176		
Food Approved	No		
Anti-Static	Yes		
Recommended Splice	Step Splice		
Clipper Lace	#1 or #2 SP		
Alligator Lace	#15		
Maximum Width	78.9"		

#### Features/Benefits:

Excellent oil, acetate, and grease resistance. Limited resistance to acids, alcohol, and solvents, avoid high concentrations. Ozone resistant. Good lateral rigidity which resists roll over when belt is mis-tracked. Fabric top and bottom for accumulation on slider beds. Used in the insulation industry for variable width roll up belts.



**COVER**

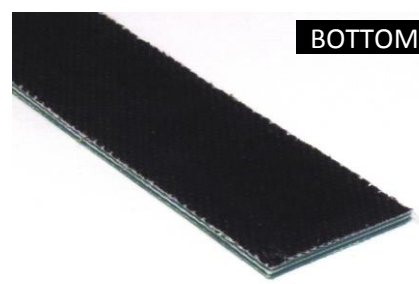

**BOTTOM**