



Belt Name:
Sparlon 6P Grey


Part #:
04-707

Technical Data

Color	Grey		
Compound	Elastomer		
Plies	1		
Fabric/Carcass	Nylon		
Cover Surface	High Abrasion Resistant Rubber Fabric Top Pattern		
Hardness	75 Durometer Shore A		
Bottom Surface	High Abrasion Resistant Rubber Fabric Top Pattern		
Recommended elongation at fitting	1.5 to 3%		
Working Strength	34# @ 1%		
Overall Gauge	.236"		
Weight per Sq Ft	1.39#		
Minimum Pulley	Normal-180°	2.36"	Back Flex 2.36"
Temp Range °F	-4°F to 176°F		
Food Approved	No		
Anti-Static	Yes		
Recommended Splice	Skive		
Clipper Lace	N/A		
Alligator Lace	N/A		
Maximum Width	19.7"		

Features/Benefits:

Excellent resistance to oils, inks, chemicals and abrasion. This belt is non-marking, offers permanent antistatic characteristics and provides high flexibility and dimensional stability. Ideal for folder gluer machines and production lines in the corrugated industry. Also suited for printing graphic industry and tube winder applications.

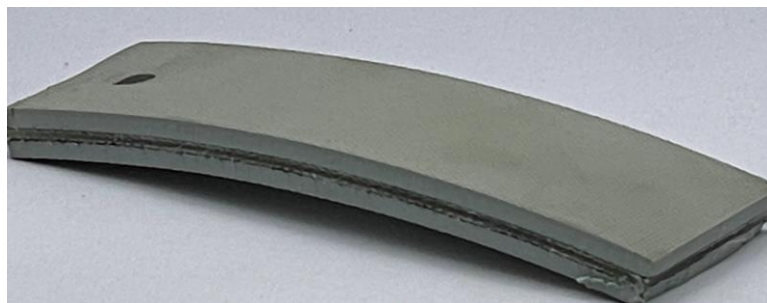

Phone: (800) 451-4537 Fax: (800) 338-2358 www.sparksbelting.com