



Belt Name:  
**Ultra Kool 1 Amber**



Part #  
**03-722**

### Technical Data

Color	Amber
Compound	Polyurethane
Plies	1
Fabric/Carcass	Monofilament Polyester
Cover Surface	.008" Smooth Gloss
Hardness	85 Durometer
Bottom Surface	PU Impregnation
Coefficient/Friction	0.15
Working Strength	23# @ 1%
Overall Gauge	.023"
Weight per Sq Ft	.12#
Minimum Pulley	
Normal-180°	.16"                      Back Flex                      .32"
Temp Range °F	-22° F to 212° F
Food Approved	Yes
Anti-Static	No
Recommended Splice	Finger
Clipper Lace	#25 SP
Alligator Lace	#00
Maximum Width	126"

#### Features/Benefits:

Very good oil and grease resistance. Limited resistance to acids, solvents and alkaline solutions. This belt has very good product release and is easy to clean. This material has proven performance on cooling tunnels and conveyors handling confectionary and baked goods. Other uses include metal detectors, weigh scale belts, packaging systems, and icing machines.

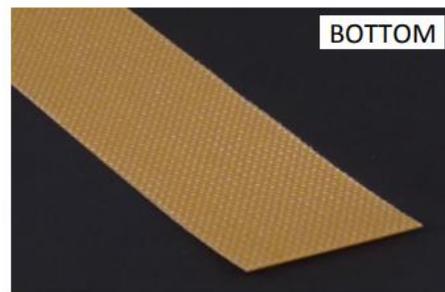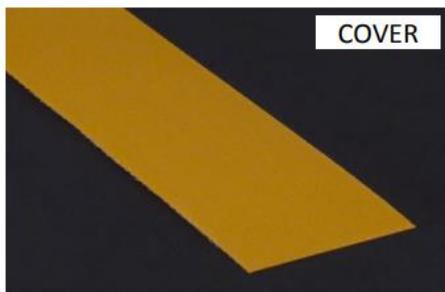

Phone: (800) 451-4537 Fax: (800) 338-2358 [www.sparksbelting.com](http://www.sparksbelting.com)