



Belt Name:
Wear Flex 140 EMB FR


Part #
02-711

Technical Data

Color	Black
Compound	PVC
Plies	1
Fabric/Carcass	Polyester Fleece
Cover Surface	Embossed
Hardness	65 Durometer Shore A
Bottom Surface	Impregnated Fleece
Coefficient/Friction	
Working Strength	150#
Overall Gauge	.141"
Weight per Sq Ft	.64#
Minimum Pulley	
Normal-180°	2" Back Flex 3.5"
Temp Range °F	20° F to 180° F
Food Approved	No
Anti-Static	Yes
Recommended Splice	Finger
Clipper Lace	#1
Alligator Lace	#15 or #125
Maximum Width	72"

Features/Benefits:

Commonly used in logistics. Backing reduces noise as well as HP required to drive traditional interwoven belts. Embossed cover allows for diverting and incline applications alike.

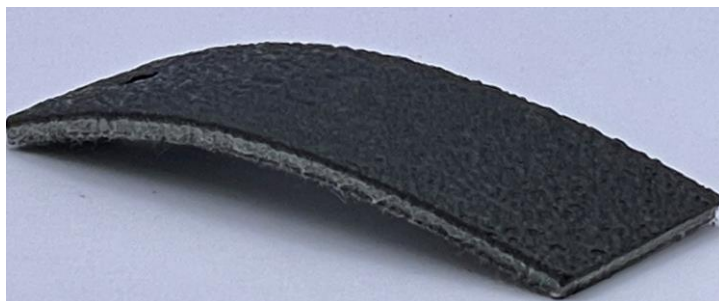

Phone: (800) 451-4537 Fax: (800) 338-2358 www.sparksbelting.com