



Belt Name:
ZL Brown 130



Part #
02-703

Technical Data

Color	Brown		
Compound	Nitrile		
Plies	1		
Fabric/Carcass	Ziplink		
Cover Surface	Rough top		
Hardness	60 Durometer Shore A		
Bottom Surface	Friction		
Coefficient/Friction	0.4		
Working Strength	150# PIW		
Overall Gauge	.250"		
Weight per Sq Ft	1.09#		
Minimum Pulley			
Normal-180°	3"	Back Flex	6"
Temp Range °F	0°F to 250°F		
Food Approved	Yes		
Anti-Static	No		
Recommended Splice	Connected Pin		
Clipper Lace	N/A		
Alligator Lace	N/A		
Maximum Width	72"		

Features/Benefits:

Ziplink belting can be installed without expensive tooling or the need for prolonged downtime. Ziplink belts are common throughout the corrugated industry. The splice area is flat and seamless which nearly mirrors a truly endless belt at a fraction of the cost. The soft brown Nitrile rough top is a non-marking surface that offers oil resistance as well as excellent product grip.

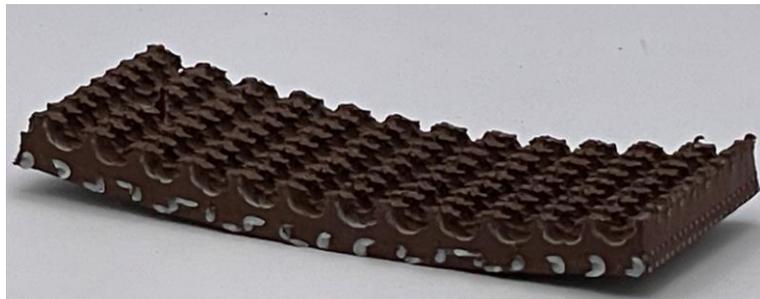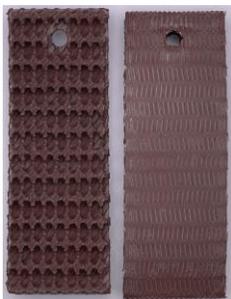

Phone: (800) 451-4537 Fax: (800) 338-2358 www.sparksbelting.com