



Belt Name:
ZL Red 110


Part #
02-702

Technical Data

Color	Red
Compound	Natural Rubber
Plies	1
Fabric/Carcass	Ziplink Polyester
Cover Surface	Smooth
Hardness	40 Durometer Shore A
Bottom Surface	Friction
Coefficient/Friction	0.4
Working Strength	150# PIW
Overall Gauge	.200"
Weight per Sq Ft	1.2#
Minimum Pulley Normal-180°	4" Back Flex 6"
Temp Range °F	0F to 250°F
Food Approved	No
Anti-Static	No
Recommended Splice	Connected Pin
Clipper Lace	N/A
Alligator Lace	N/A
Maximum Width	72"

Features/Benefits:

Ziplink belting can be installed without expensive tooling or the need for prolonged downtime. Ziplink belts are common throughout the corrugated industry. The splice area is flat and seamless which nearly mirrors a truly endless belt at a fraction of the cost. The soft natural rubber cover is ideal for demanding applications that require a belt to actively grip the product. This belt utilizes the entire surface as opposed to a profile for increased COF.

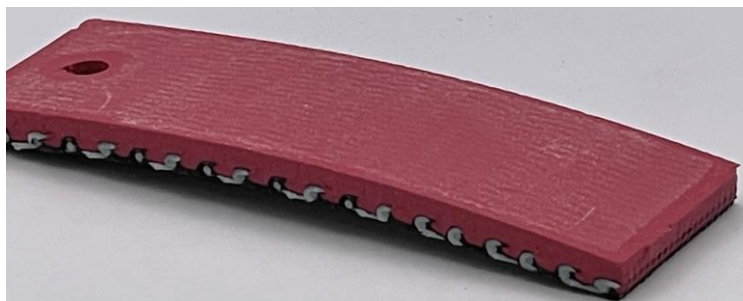

Phone: (800) 451-4537 Fax: (800) 338-2358 www.sparkselting.com