


Sno Cone

02-305 | Technical Data Sheet

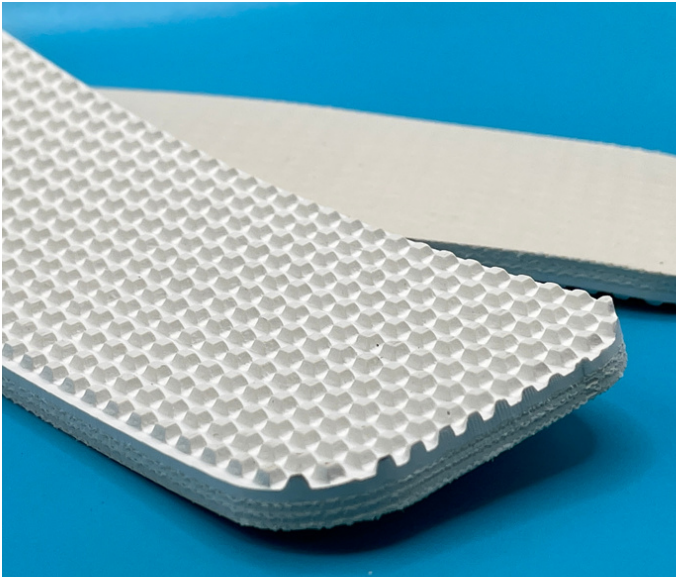

Technical Information

| | |
|---------------------------------|-----------------|
| Plies | 3 |
| Overall Thickness | .204" |
| Tensile Force | 90# @ 2% |
| in N/mm | 15.75 |
| Standard Tension | 1.0% |
| Min. Pulley | 2.5" |
| Min. Back Flex | 4.5" |
| Weight | 1.20 Lbs/SF |
| Product Operational Temp. Range | 0° to 250° F |
| Hardness | 50 Duro Shore A |
| Max. Width | 60" |

Material Construction

Conveying Surface

| | |
|---------------|---------|
| Compound | Buna-N |
| Cover Surface | Pyramid |
| Color | White |

Underside

| | |
|-------------------------|-----------|
| Fabric | Polyester |
| Bottom Surface | Friction |
| Coefficient of Friction | .50 |

Standard Fabrications

| | |
|-------------------------|-----|
| Longitudinal Splice | Yes |
| Guide Applied to Cover | No |
| Sidewalls | No |
| Edge Capped | No |
| Cleats | No |
| Guide Applied to Bottom | Yes |
| Mechanical Lacing | Yes |

Features

| | |
|-----------------------|-----|
| FDA | Yes |
| Anti-Microbial | No |
| Anti-Static | No |
| Flame Retardant | No |
| Cross Rigid | No |
| Troughing | Yes |
| Curve Belt Compatible | No |

Sno Cone


02-305 | Splicing Instructions

High Speed Press Settings

| | |
|----------------|-------------|
| Pressure | No settings |
| Temp. Top | |
| Temp. Bottom | |
| Dwell Time | |
| Foil Position | |
| Foil | |
| Release Top | |
| Release Bottom | |

Water Cooled Press Settings

| | |
|----------------|------------|
| Pressure | 45 psi |
| Temp. Top | 285° F |
| Temp. Bottom | 285° F |
| Dwell Time | 35 minutes |
| Foil Position | None |
| Foil | None |
| Release Top | Impression |
| Release Bottom | TFE |

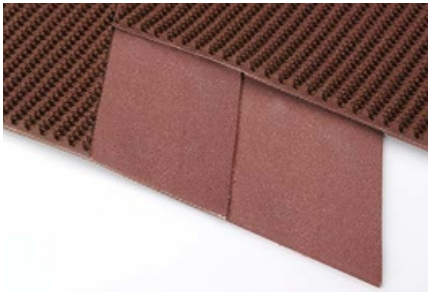

Scan for splicing
demo video

Compatible Splices

Endless Splices

| | |
|------------------|-----|
| Step Splice | Yes |
| Straight Finger | No |
| Split Finger | No |
| Bias Finger | No |
| Skive | No |
| Finger Over Step | No |
| Step Over Finger | No |
| Electrode | No |
| Butt Weld | No |
| Lock Lap | Yes |

Mechanical Splices

| | |
|----------------|-----|
| Clipper | Yes |
| Alligator | Yes |
| Staple | Yes |
| Minet | Yes |
| Plastic Spiral | No |
| Plastic Rivet | No |
| Plastic Hinge | No |
| Super Screw | No |
| Bolt Hinge | No |
| Rivet Hinge | Yes |

Sparks Specialty Splices

| | |
|-----------------|-----|
| Hidden | Yes |
| Hybrid | No |
| Trailing Flap | Yes |
| VT | No |
| Hybrid VT | No |
| 7/11 | No |
| Urethane Top | Yes |
| Urethane Bottom | Yes |
| Urethane Splash | Yes |