


# SR 25

## 02-425 | Technical Data Sheet

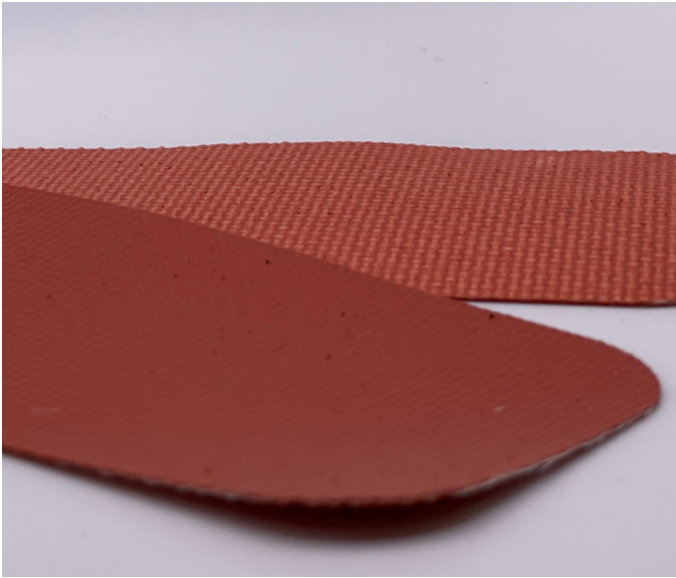

### Technical Information

Plies	1
Overall Thickness	.025"
Tensile Force	50# @ 2%
in N/mm	8.75
Standard Tension	.50%
Min. Pulley	.5"
Min. Back Flex	1"
Weight	.160 Lbs/SF
Product Operational Temp. Range	-76° to 400° F
Hardness	45 Duro Shore A
Max. Width	52"

### Material Construction

#### Conveying Surface

Compound	Silicone
Cover Surface	Smooth
Color	Red

#### Underside

Fabric	Woven Fiberglass
Bottom Surface	Coated Fabric
Coefficient of Friction	.25

### Standard Fabrications

Longitudinal Splice	No
Guide Applied to Cover	No
Sidewalls	No
Edge Capped	No
Cleats	No
Guide Applied to Bottom	No
Mechanical Lacing	Yes

### Features

FDA	No
Anti-Microbial	No
Anti-Static	No
Flame Retardant	No
Cross Rigid	No
Troughing	No
Curve Belt Compatible	No

# SR 25

## 02-425 | Splicing Instructions

### High Speed Press Settings

Pressure	No Settings
Temp. Top	
Temp. Bottom	
Dwell Time	
Foil Position	
Foil	
Release Top	
Release Bottom	

### Water Cooled Press Settings

Pressure	No Settings
Temp. Top	
Temp. Bottom	
Dwell Time	
Foil Position	
Foil	
Release Top	
Release Bottom	

## Compatible Splices

### Endless Splices

Step Splice	No
Straight Finger	No
Split Finger	No
Bias Finger	No
Skive	No
Finger Over Step	No
Step Over Finger	No
Electrode	No
Butt Weld	No
Lock Lap	No

### Mechanical Splices

Clipper	Yes
Alligator	Yes
Staple	No
Minet	No
Plastic Spiral	No
Plastic Rivet	Yes
Plastic Hinge	No
Super Screw	No
Bolt Hinge	No
Rivet Hinge	No

### Sparks Specialty Splices

Hidden	No
Hybrid	No
Trailing Flap	No
VT	No
Hybrid VT	No
7/11	No
Urethane Top	No
Urethane Bottom	No
Urethane Splash	No