


BF BLPO 210 M

03-720 | Technical Data Sheet

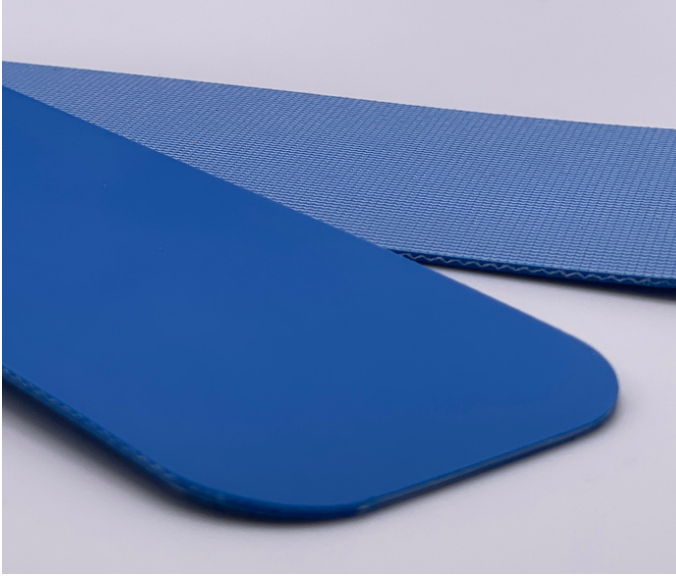

Technical Information

Plies	2
Overall Thickness	.043"
Tensile Force	23# @ 1%
in N/mm	4
Standard Tension	.50%
Min. Pulley	.25"
Min. Back Flex	.8"
Weight	.20 Lbs/SF
Product Operational Temp. Range	-40° to 140° F
Hardness	92 Duro Shore A
Max. Width	116"

Material Construction

Conveying Surface

Compound	Polyolefin
Cover Surface	.008" Smooth Matte
Color	Blue

Underside

Fabric	Non-Fray Polyester
Bottom Surface	PU Impregnated
Coefficient of Friction	.20

Standard Fabrications

Longitudinal Splice	No
Guide Applied to Cover	No
Sidewalls	No
Edge Capped	No
Cleats	No
Guide Applied to Bottom	No
Mechanical Lacing	Yes

Features

FDA	Yes
Anti-Microbial	No
Anti-Static	Yes
Flame Retardant	No
Cross Rigid	No
Troughing	Yes
Curve Belt Compatible	Yes

BF BLPO 210 M

03-720 | Splicing Instructions

High Speed Press Settings

Pressure	20 psi
Temp. Top	284° F
Temp. Bottom	284° F
Dwell Time	45 sec
Foil Position	Top
Foil	Clear PU
Release Top	Matte
Release Bottom	Silicone

Water Cooled Press Settings

Pressure	20 psi
Temp. Top	284° F
Temp. Bottom	284° F
Dwell Time	30 sec
Foil Position	Top
Foil	Clear PU
Release Top	Matte
Release Bottom	Silicone



Scan for splicing
demo video

Compatible Splices

Endless Splices

Step Splice	No
Straight Finger	Yes
Split Finger	No
Bias Finger	Yes
Skive	No
Finger Over Step	No
Step Over Finger	No
Electrode	No
Butt Weld	No
Lock Lap	No

Mechanical Splices

Clipper	Yes
Alligator	Yes
Staple	No
Minet	No
Plastic Spiral	No
Plastic Rivet	Yes
Plastic Hinge	No
Super Screw	No
Bolt Hinge	No
Rivet Hinge	No

Sparks Specialty Splices

Hidden	No
Hybrid	No
Trailing Flap	No
VT	No
Hybrid VT	No
7/11	No
Urethane Top	No
Urethane Bottom	No
Urethane Splash	No