


# APF 1040 RT

08-001 | Technical Data Sheet

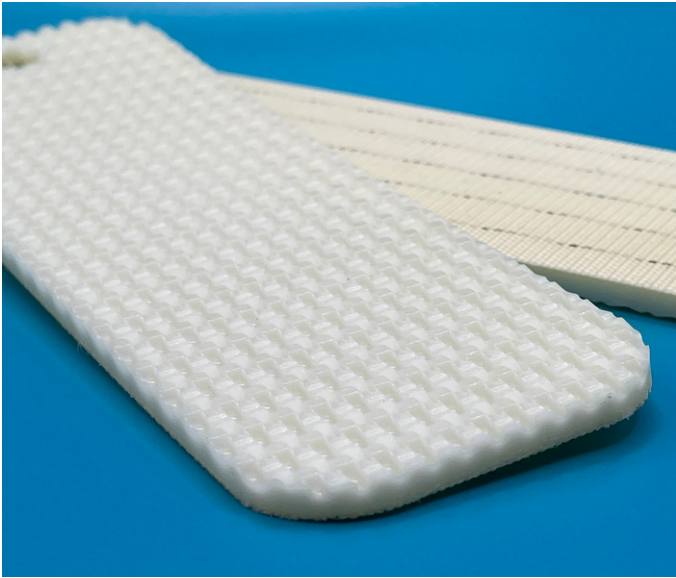

## Technical Information

Plies	1
Overall Thickness	.157"
Tensile Force	19# @ 1%
in N/mm	3.3
Standard Tension	.50%
Min. Pulley	1.1875"
Min. Back Flex	2.375"
Weight	.76 Lbs/sf
Product Operational Temp. Range	-40° to 120° F
Hardness	80 Duro Shore A
Max. Width	60"

## Material Construction

### Conveying Surface

Compound	Hytre/Poly
Cover Surface	Rough Top
Color	White

### Underside

Fabric	Fabric Reinforced
Bottom Surface	Fabric
Coefficient of Friction	.20

## Standard Fabrications

Longitudinal Splice	No
Guide Applied to Cover	Yes
Sidewalls	Yes
Edge Capped	No
Cleats	Yes
Guide Applied to Bottom	Yes
Mechanical Lacing	Yes

## Features

FDA	Yes
Anti-Microbial	No
Anti-Static	Yes
Flame Retardant	No
Cross Rigid	No
Troughing	No
Curve Belt Compatible	No

# APF 1040 RT

## 08-001 | Splicing Instructions

### High Speed Press Settings

Pressure	No Settings
Temp. Top	
Temp. Bottom	
Dwell Time	
Foil Position	
Foil	
Release Top	
Release Bottom	

### Water Cooled Press Settings

Pressure	No Settings
Temp. Top	
Temp. Bottom	
Dwell Time	
Foil Position	
Foil	
Release Top	
Release Bottom	

## Compatible Splices

### Endless Splices

Step Splice	No
Straight Finger	No
Split Finger	No
Bias Finger	No
Skive	No
Finger Over Step	No
Step Over Finger	No
Electrode	Yes
Butt Weld	Yes
Lock Lap	No

### Mechanical Splices

Clipper	Yes
Alligator	Yes
Staple	Yes
Minet	Yes
Plastic Spiral	No
Plastic Rivet	No
Plastic Hinge	Yes
Super Screw	No
Bolt Hinge	No
Rivet Hinge	No

### Sparks Specialty Splices

Hidden	No
Hybrid	No
Trailing Flap	No
VT	No
Hybrid VT	No
7/11	No
Urethane Top	No
Urethane Bottom	No
Urethane Splash	No