


Technical Data


Color	Black		
Compound	Buna-N		
Plies	3		
Fabric/Carcass	Polyester Nylon		
Cover Surface	.188" Rough Top		
Hardness	70 Durometer		
Bottom Surface	Friction		
Coefficient/Friction	.25 on Steel		
Working Strength	150		
Overall Gauge	.312"		
Weight per Sq Ft	1.3		
Minimum Pulley	Normal-180°	2.5"	Back Flex 4"
Temp Range °F	0 to 250		
Food Approved	No		
Anti-Static	No		
Recommended Splice	Step Lap		
Clipper Lace	#1 or #2 SP		
Alligator Lace	#15 Recessed		
Maximum Width	72"		

Features/Benefits:

Excellent oil and grease resistance. Very good resistance to acids and solvents, but avoid high concentrations. Ozone resistant. Treated carcass increases ply adhesion and decreases edge curl. This belt has a deep rough top impression. Proven performance in airport baggage handling, wood and metal sanders and automotive stampings. For laces, a recessed cover is recommended.

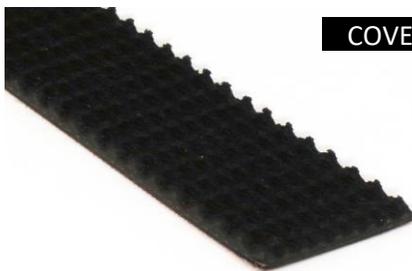

COVER

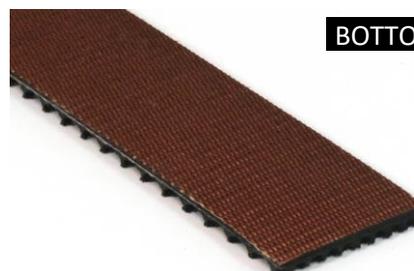

BOTTOM