


Technical Data

Color	Black		
Compound	Rubber		
Plies	2		
Fabric/Carcass	Polyester		
Cover Surface	.156" Rough Top		
Hardness	70 Durometer		
Bottom Surface	Bare		
Coefficient/Friction	.25 on Steel		
Working Strength	150 lbs piw		
Overall Gauge	.235"		
Weight per Sq Ft	1.1		
Minimum Pulley	Normal-180°	2"	Back Flex 3"
Temp Range °F	-40 to 250		
Food Approved	No		
Anti-Static	No		
Recommended Splice	Step Lap		
Clipper Lace	#2 SP Recessed		
Alligator Lace	#15 Recessed		
Maximum Width	72"		

Features/Benefits:

Avoid oil, grease and solvents. Treated fabric increases ply/cover adhesion and decreases edge curl. Thick skims between the plies provide greater bulk and desired rigidity. Excellent for general warehouse applications. For laces, a recessed cover is recommended.

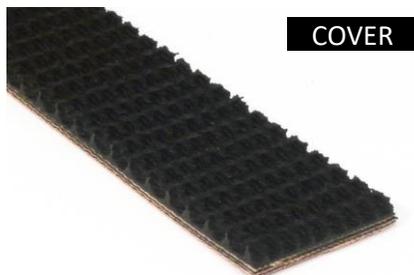

COVER



BOTTOM