



Belt Name:
Econo Ruff Black FR

Part #:

Technical Data


Color	Black		
Compound	Rubber	FR Rated ASTM D-378	
Plies	1		
Fabric/Carcass	Polyester		
Cover Surface	.156" Rough Top		
Hardness	70 Durometer		
Bottom Surface	Bare		
Coefficient/Friction	.25 on Steel		
Working Strength	150 lb piw		
Overall Gauge	.235"		
Weight per Sq Ft	1.1		
Minimum Pulley			
Normal-180°	3"	Back Flex	3"
Temp Range °F	-40 to 250		
Food Approved	No		
Anti-Static	No		
Recommended Splice	Step Lap		
Clipper Lace	#2 SP Recessed		
Alligator Lace	#15 Recessed		
Maximum Width	72"		

Features/Benefits:

Excellent for general incline and decline warehouse applications. Treated fabric increases ply/cover adhesion and decreases edge curl. Thick skims between the plies provide greater bulk and desired rigidity. For laces, a recessed cover is recommended. Avoid oil, grease and solvents.



Cover

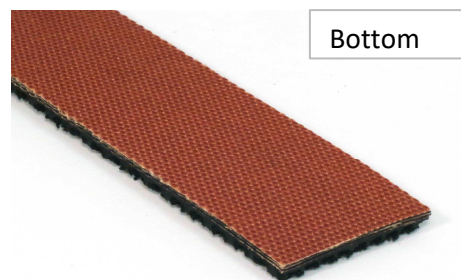

Bottom