


### Technical Data


Color	White		
Compound	Buna-N		
Plies	3		
Fabric/Carcass	Polyester		
Cover Surface	.046" Smooth		
Hardness	75 Durometer		
Bottom Surface	Friction		
Coefficient/Friction	.25 on Steel		
Working Strength	105 lbs piw		
Overall Gauge	.110"		
Weight per Sq Ft	.88		
Minimum Pulley	Normal-180°	2"	Back Flex 4"
Temp Range °F	10 to 250		
Food Approved	Yes		
Anti-Static	No		
Recommended Splice	Step Lap		
Clipper Lace	#1 A		
Alligator Lace	#7		
Maximum Width	72"		

#### Features/Benefits:

Excellent oil and grease resistance. Very good resistance to acids and solvents but avoid high concentrations. Ozone resistant. Treated carcass increases ply adhesion and decreases edge curl. A favorite in many meat, poultry, fish, pizza, dairy, fruit, vegetable and pharmaceutical applications. Other uses include vacuum suction belts in packaging lines in food plants.

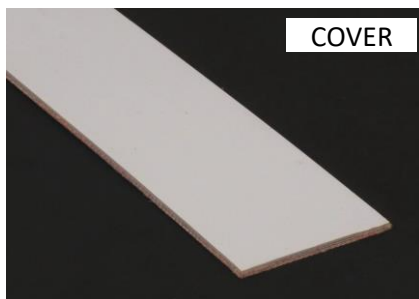

COVER

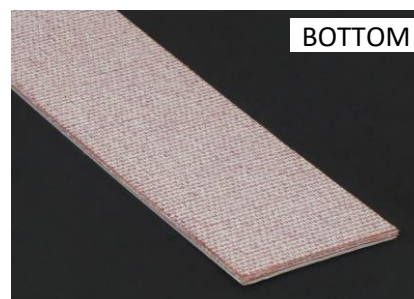

BOTTOM