



A JSJ Business

Belt Name:

Foodthane 90 AM Blue

Part #:


01-024

Technical Data

| | |
|----------------------|---|
| Color | Blue |
| Compound | Polyurethane |
| Plies | 0 |
| Fabric/Carcass | Kevlar |
| Cover Surface | Smooth cover |
| Hardness | 85 Durometer |
| Bottom Surface | Smooth Cover |
| Coefficient/Friction | .50 on Steel |
| Working Strength | 90 lbs piw |
| Overall Gauge | .125" |
| Weight per Sq Ft | .82 |
| Minimum Pulley | |
| Normal-180° | 2" Back Flex 2" |
| Temp Range °F | -10 to 175 |
| Food Approved | Yes |
| Anti-Static | No |
| Recommended Splice | Finger Splice or Hot V |
| Clipper Lace | #1 |
| Alligator Lace | Not Recommended |
| Maximum Width | 48" |

Features/Benefits:

Excellent oil and grease resistance, including coconut oil and cocoa butter. Excellent resistance to acids, solvents, and alkaline solutions. Kevlar cord reinforcement tensile member adds strength and reduces stretch to only 1%. With no exposed fabric, belt eliminates ply separation. Good resistance to abrasion, cutting, gouging and tearing requirements in deboning, dicing and other meat or food processing applications.

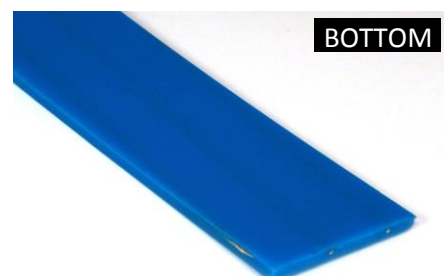

Phone: (800) 451-4537 Fax: (800) 338-2358 www.sparksbelting.com