


Technical Data


Color	Brown		
Compound	Buna-N		
Plies	3		
Fabric/Carcass	Polyester Nylon		
Cover Surface	.125 Rough Top		
Hardness	70 Durometer		
Bottom Surface	Treated Fabric		
Coefficient/Friction	.25 on Steel		
Working Strength	150 lbs piw		
Overall Gauge	.281"		
Weight per Sq Ft	1.2		
Minimum Pulley	Normal-180°	2"	Back Flex 3"
Temp Range °F	10 to 250		
Food Approved	Yes		
Anti-Static	No		
Recommended Splice	Step Lap		
Clipper Lace	#2 Recessed		
Alligator Lace	#20 Recessed		
Maximum Width	72"		

Features/Benefits:

Excellent oil (including sesame seed oil) and grease resistance. Very good resistance to acids and solvents but avoid high concentrations. Ozone resistant. Treated carcass increases ply adhesions and decreases edge curl. Has deep rough top impression.

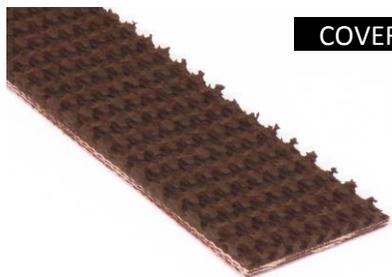

COVER

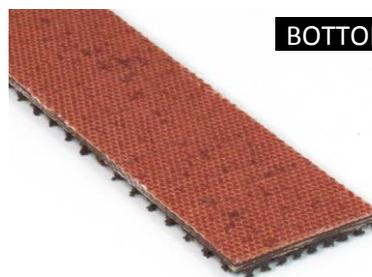

BOTTOM