



Belt Name:

**2 Ply 220 MOR 1/8 x 1/16**

Part #:


**29M21/02-066**

**Technical Data**

Color	Black		
Compound	MOR (Moderate Oil Resistant)		
Plies	2		
Fabric/Carcass	Polyester/Nylon		
Cover Surface	1/8" Smooth		
Hardness	60 Duro		
Bottom Surface	1/16" Smooth		
Working Strength	220		
Overall Gauge	0.30", 19/64", 7.56mm		
Weight per Sq Ft	1.9		
Minimum Pulley	60-80% tension	Back Flex	60-80% tension
Normal-180°	12"		12"
Temp Range °F	-20 to 250		
Food Approved	N		
Anti-Static	N		
Recommended Splice	Laced 187, R2, R5, 140, 375	Vulcanized Step length (bias)	6-8"
Clipper Lace	N/A		
Alligator Lace	N/A		
Maximum Width Available	72"		

**Features/Benefits:**

General purpose MOR belting used to carry items such as wood chips, agriculture, recyclables, or material with some oils present. Common industries: Wood Chip, Recycle Processor, Brick Production. Not good for recycled asphalt applications. Moderate oil resistant, moderate abrasion resistance. Recommend use on roller bed conveyors.

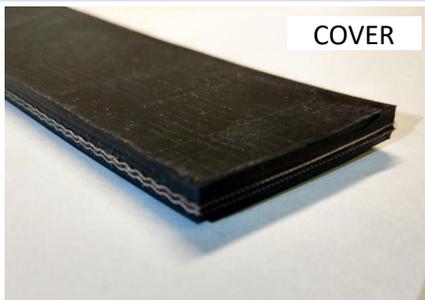

COVER



BOTTOM

**D&D Belt Service** Phone (800) 799-0116 [info@ddbeltservice.com](mailto:info@ddbeltservice.com) [www.ddbeltservice.com](http://www.ddbeltservice.com)  
**Sparks Belting Company** Phone (800) 451-4537 Fax (800) 338-2358 [www.sparksbelting.com](http://www.sparksbelting.com)