



Belt Name:
Mono Flex BLP 210



Part #:
03-427

Technical Data

Color	Blue		
Compound	PVC		
Plies	2		
Fabric/Carcass	Monofilament Polyester		
Cover Surface	.020" Smooth		
Hardness	65 Durometer		
Bottom Surface	Bare		
Coefficient/Friction	.20 on Steel		
Working Strength	70 lbs piw		
Overall Gauge	.075"		
Weight per Sq Ft	.41		
Minimum Pulley	Normal-180°	1.2"	Back Flex 2.4"
Temp Range °F	14 to 230		
Food Approved	Yes		
Anti-Static	No		
Recommended Splice	Split Finger		
Clipper Lace	#36 SP		
Alligator Lace	#1 A		
Maximum Width	80.7"		

Features/Benefits:

Excellent oil and grease resistance. Good resistance to chemicals and solvents. FDA approved: FDA #21 CFR 175.300. Belt lays flat with no edge curl. Recommended for packaged and unpackaged food products and for a broad base of general conveyance.

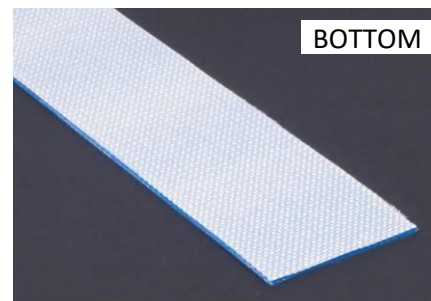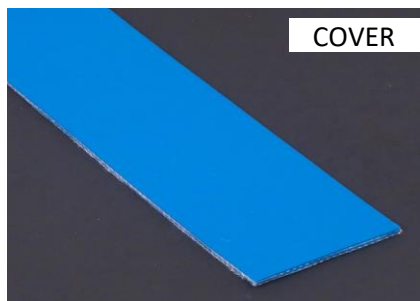

Phone: (800) 451-4537 Fax: (800) 338-2358 www.sparksbelting.com