



Belt Name:
Mono Flex BLP 290

Part #:
03-425

Technical Data


Color	Blue		
Compound	PVC		
Plies	2		
Fabric/Carcass	Monofilament Polyester		
Cover Surface	.039" Long Ribs		
Hardness	40 Durometer		
Bottom Surface	Bare		
Coefficient/Friction	.20 on Steel		
Working Strength	56 lbs. @ 1% Elongation		
Overall Gauge	.102"		
Weight per Sq Ft	0.61		
Minimum Pulley			
Normal-180°	1.6"	Back Flex	2.4"
Temp Range °F	-13 to 194		
Food Approved	No		
Anti-Static	No		
Recommended Splice	Split Finger/SFL		
Clipper Lace	#36 or #1A		
Alligator Lace	#7		
Maximum Width	80.7"		

Features/Benefits:

Excellent oil and grease resistance. Very good resistance to acids and solvents but avoid high concentrations. Ozone resistant. Monofilament fabric means belts lay flat and track well. Ideal for incline and decline service for plastic totes, packing and sorting. Transport of packaged products. Ideally suited for conveying plastic tote trays and waxed cartons. BLP 290 has soft longitudinal ribs for increased surface contact for paper converting...and on accelerations, sorters, and take-aways in airports and distribution centers.



COVER

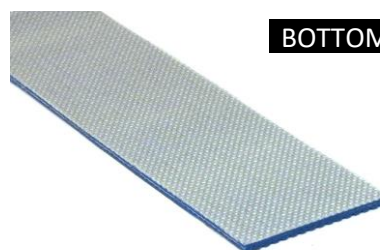

BOTTOM

Phone: (800) 451-4537 Fax: (800) 338-2358 www.sparksbelt.com