


# Monoflex BP 120

03-052 | Technical Data Sheet

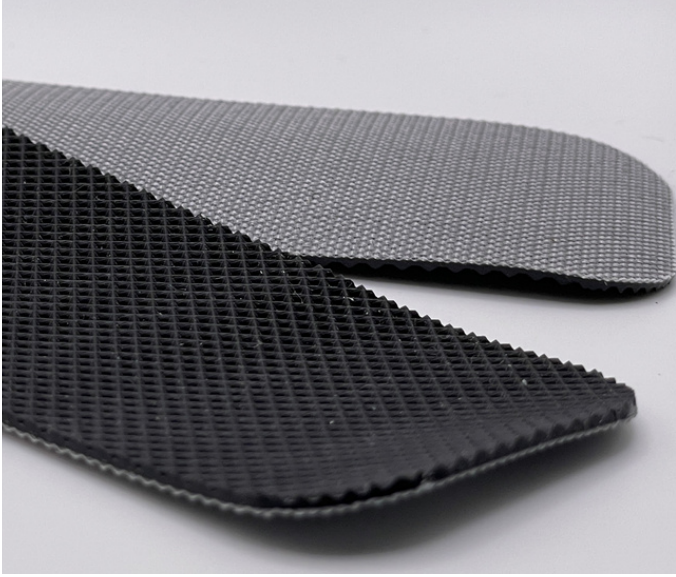

## Technical Information

Plies	1
Overall Thickness	.067"
Tensile Force	34# @ 1%
in N/mm	6
Standard Tension	.5%
Min. Pulley	.6"
Min. Back Flex	1"
Weight	.35 Lbs/SF
Product Operational Temp. Range	20° to 180° F
Hardness	45 Duro Shore A
Max. Width	78"

## Material Construction

### Conveying Surface

Compound	PVC
Cover Surface	Inverted Diamond
Color	Black

### Underside

Fabric	Multifilament Polyester
Bottom Surface	Bare
Coefficient of Friction	.2

## Standard Fabrications

Longitudinal Splice	No
Guide Applied to Cover	No
Sidewalls	No
Edge Capped	No
Cleats	No
Guide Applied to Bottom	Yes
Mechanical Lacing	Yes

## Features

FDA	No
Anti-Microbial	No
Anti-Static	Yes
Flame Retardant	No
Cross Rigid	No
Troughing	Yes
Curve Belt Compatible	Yes

# Monoflex BP 120

03-052 | Splicing Instructions

## High Speed Press Settings

Pressure	25 psi
Temp. Top	390° F
Temp. Bottom	335° F
Dwell Time	60 sec
Foil Position	None
Foil	None
Release Top	Impression
Release Bottom	TFE

## Water Cooled Press Settings

Pressure	No settings
Temp. Top	
Temp. Bottom	
Dwell Time	
Foil Position	
Foil	
Release Top	
Release Bottom	



Scan for splicing demo video

## Compatible Splices

### Endless Splices

Step Splice	No
Straight Finger	Yes
Split Finger	No
Bias Finger	Yes
Skive	No
Finger Over Step	No
Step Over Finger	No
Electrode	No
Butt Weld	No
Lock Lap	No

### Mechanical Splices

Clipper	Yes
Alligator	Yes
Staple	No
Minet	No
Plastic Spiral	No
Plastic Rivet	No
Plastic Hinge	No
Super Screw	No
Bolt Hinge	No
Rivet Hinge	No

### Sparks Specialty Splices

Hidden	No
Hybrid	No
Trailing Flap	No
VT	No
Hybrid VT	No
7/11	No
Urethane Top	No
Urethane Bottom	No
Urethane Splash	No