


APF B 930 DD (FMB 3 DD)

08-013 | Technical Data Sheet

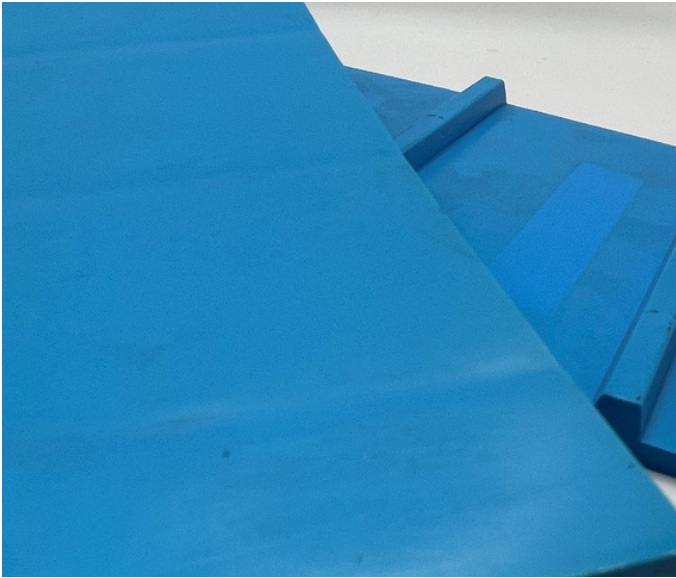

Technical Information

Plies	N/A
Overall Thickness	.118"
Tensile Force	33.6#
in N/mm	6
Standard Tension	0%
Min. Pulley	3.15"
Min. Back Flex	3.94"
Weight	.92 Lbs/sf
Product Operational Temp. Range	-5° to 158° F
Hardness	53 Duro Shore D
Max. Width	60"

Material Construction

Conveying Surface

Compound	Hytre/Poly
Cover Surface	Smooth Glossy
Color	Blue

Underside

Fabric	None
Bottom Surface	Dual Drive
Coefficient of Friction	.50

Standard Fabrications

Longitudinal Splice	No
Guide Applied to Cover	Yes
Sidewalls	Yes
Edge Capped	Yes
Cleats	Yes
Guide Applied to Bottom	No
Mechanical Lacing	Yes

Features

FDA	Yes
Anti-Microbial	No
Anti-Static	No
Flame Retardant	No
Cross Rigid	No
Troughing	Yes
Curve Belt Compatible	No

APF B 930 DD (FMB 3 DD)

08-013 | Splicing Instructions

High Speed Press Settings

Pressure No Settings
 Temp. Top
 Temp. Bottom
 Dwell Time
 Foil Position
 Foil
 Release Top
 Release Bottom

Water Cooled Press Settings

Pressure No Settings
 Temp. Top
 Temp. Bottom
 Dwell Time
 Foil Position
 Foil
 Release Top
 Release Bottom

Compatible Splices

Endless Splices

Step Splice	No
Straight Finger	No
Split Finger	No
Bias Finger	No
Skive	No
Finger Over Step	No
Step Over Finger	No
Electrode	No
Butt Weld	Yes
Lock Lap	No

Mechanical Splices

Clipper	No
Alligator	No
Staple	Yes
Minet	Yes
Plastic Spiral	No
Plastic Rivet	No
Plastic Hinge	Yes
Super Screw	No
Bolt Hinge	No
Rivet Hinge	No

Sparks Specialty Splices

Hidden	No
Hybrid	No
Trailing Flap	No
VT	No
Hybrid VT	No
7/11	No
Urethane Top	No
Urethane Bottom	No
Urethane Splash	No